




**REVERBERATION ROOM TESTING
ACCORDING TO EN ISO 354**

Stratocell
Whisper®
50mm
is classified as high
absorbent – according
to EN ISO 11654 –
Class A

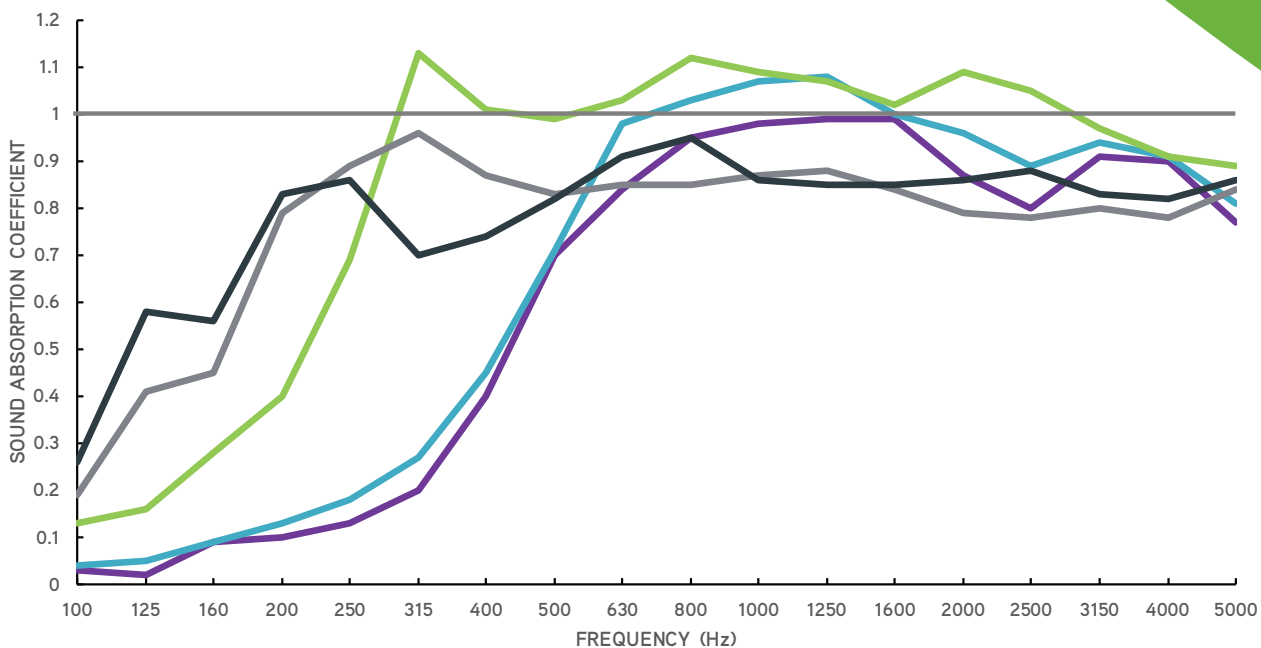

	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	NRC	SAA
Whisper 20mm	0.03	0.02	0.09	0.1	0.13	0.2	0.4	0.7	0.84	0.95	0.98	0.99	0.99	0.87	0.8	0.91	0.9	0.77	0.65	0.65
Whisper 25mm	0.04	0.05	0.09	0.13	0.18	0.27	0.45	0.71	0.98	1.03	1.07	1.08	1	0.96	0.89	0.94	0.91	0.81	0.75	0.76
Whisper 50mm	0.13	0.16	0.28	0.4	0.69	1.13	1.01	0.99	1.03	1.12	1.09	1.07	1.02	1.09	1.05	0.97	0.91	0.89	1	0.98
Whisper 60mm	0.19	0.41	0.45	0.79	0.89	0.96	0.87	0.83	0.85	0.85	0.87	0.88	0.84	0.79	0.78	0.8	0.78	0.84	0.85	0.85
Whisper 100mm	0.26	0.58	0.56	0.83	0.86	0.7	0.74	0.82	0.91	0.95	0.86	0.85	0.85	0.86	0.88	0.83	0.82	0.86	0.85	0.84

Testing of Stratocell Whisper® was carried out by Eco-scan bvba, Belgium under EN ISO 354 Measurement of Sound Absorption in a reverberation room. www.ecoscan.be